

3-4 Clutch Boost Spring


Part No.

77763-01

- Springs (10)

NOTE: Fits '88-later.

GM 4L60, 4L60-E, 4L65-E, 4L70-E

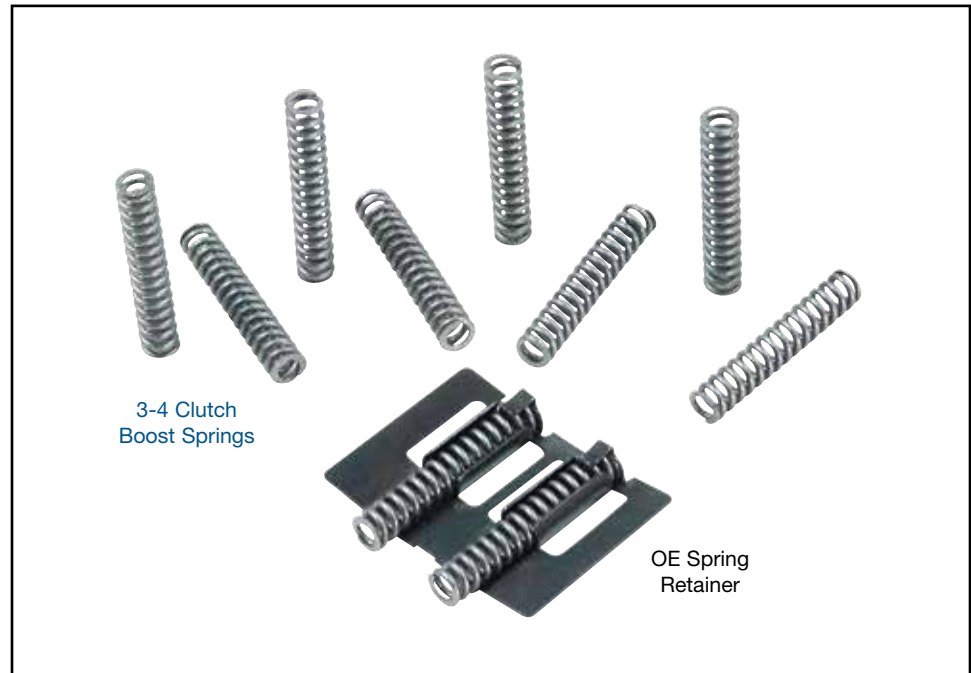

1. Disassembly

- Locate five OE sheet-metal spring retainers found in the 3-4 clutch housing.
- Carefully pull OE boost springs straight out from the spring retainers to avoid damage.
- Discard OE springs and keep spring retainers for reuse.

2. Installation & Assembly

- Install Sonnax 3-4 clutch boost springs into the five OE retainers.
- Reinstall restored spring retainers into the 3-4 clutch.
- Set clutch plate clearance per factory specification and complete transmission assembly.